



BR-10TW

1.0" TWEETER


FERRITE MAGNET TWEETER

- 1 INCH EDGEWOUND CCA VOICE COLL
- 105 dB/SPL SENSITIVITY
- 100 WATT PROGRAM POWER HANDLING
- FEM OPTIMIZED MOTOR AND SUSPENSIONS
- OPTIMIZED COOLING SYSTEM
- DUAL ROLL SUGGOUND

GENERAL SPECIFICATIONS

| | | |
|---------------------------|-----------|------------|
| Overall Dimensions | mm | 97*44 |
| RMS POWER | W | 100 |
| MAX POWER | W | 200 |
| Sensitivity | dB | 105 |
| Frequency Response | Hz | 2.5K-20K |
| Voice Coil Diameter | mm | 25.5 |
| Nominal Impedance | ohms | 4 |
| DC Resistance | ohms | 3.3 |
| Magnet (OZ) | Ferrite | |
| Basket material | Aluminium | |
| Coil Material | CCAW | |
| Former material | Kapton | |
| Cone Material | Aluminium | |
| Surround material | Aluminium | |
| Voice coil winding height | mm | 2.3 |
| Gap height | mm | 3 |
| Xmax | mm | |
| BL Product | N.A | |
| Net weight | kg | 0.5 |
| Fs | Hz | 3.9 |
| CROSSOVER | | |
| Type | | 3.3uF/100V |

SPL vs Freq

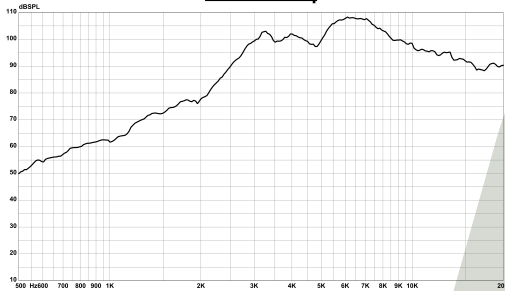

Impedance vs Freq

