



BR-120W


12" SUBWOOFER

FERRITE MAGNET


STEEL BASKET TRANSDUCER

- 2 INCH EDGEWOUND CCA VOICE COLL
- 86.7 dB/SPL SENSITIVITY
- 300 WATT PROGRAM POWER HANDLING
- FEM OPTIMIZED MOTOR AND SUSPENSIONS
- OPTIMIZED COOLING SYSTEM
- FOUL ROLL SUGGOUND
- RESONANCE FREE AND HEAVY DUTY BASKET DESIGN

SPL vs Freq

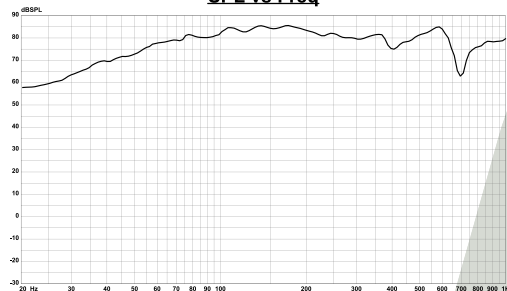

Impedance vs Freq

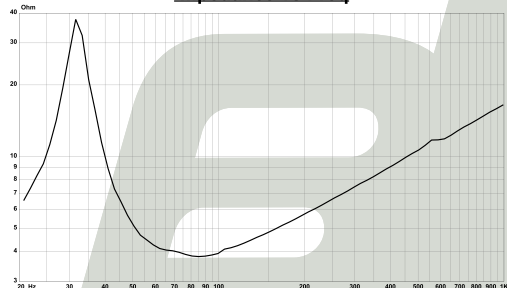

GENERAL SPECIFICATIONS

Overall Dimensions	mm	316*154
RMS POWER	W	300
MAX POWER	W	1200
Sensitivity	dB	86.7
Frequency Response	Hz	35-500
Voice Coil Diameter	mm	50.8
Nominal Impedance	ohms	4
DC Resistance	ohms	3.3
Magnet (OZ)	Ferrite	
Basket material	Stamped Steel	
Coil Material	Copper	
Former material	Aluminum	
Cone Material	Paper	
Surround material	Foam	
Voice coil winding height	mm	21.4
Gap height	mm	8
Xmax	mm	6.7
BL Product	N.A	10.44
Net weight	kg	3.6

T-S PARAMETERS

Fs	Hz	32
Mms	g	127.5
Cms	mm/N	0.18
Qms		5.49
Qes		0.78
Qts		0.68
Vas	L	69.8
Sd	cm ²	510.7
No	%	0.29

